

## JXF Series Metal Distribution Box



### 1 Technical Parameters

- Rated working voltage: 220/380V AC
- Short-time withstand current:
- Max. rated working current:
- Material  
 Made of cold-roll steel sheet, with the surface treated with electrostatic spray technology, sturdy and durable
- Protection grade: IP40
- Available Standard:


### 2 Ordering Notice

Housing thickness (mm)	Number of door locks (pcs)	Order No.	
		Indoor box	Outdoor box
1.0	1	JXF252014	JXF252014H
1.0	1	JXF302514	JXF302514H
1.0	1	JXF302518	JXF302518H
1.0	1	JXF303014	JXF303014H
1.0	1	JXF303018	JXF303018H
1.0	1	JXF403014	JXF403014H
1.0	1	JXF403020	JXF403020H
1.0	2	JXF504014	JXF504014H
1.0	2	JXF504020	JXF504020H
1.0	2	JXF504025	JXF504025H
1.2	2	JXF604014	JXF604014H
1.2	2	JXF604020	JXF604020H
1.2	2	JXF604025	JXF604025H
1.2	2	JXF605014	JXF605014H
1.2	2	JXF605020	JXF605020H
1.2	2	JXF605025	JXF605025H
1.2	2	JXF705016	JXF705016H
1.2	2	JXF705020	JXF705020H
1.2	2	JXF705025	JXF705025H
1.5	2	JXF806020	JXF806020H
1.5	2	JXF806025	JXF806025H
1.5	2	JXF1008020	JXF1008020H
1.5	2	JXF1008025	JXF1008025H
1.5	2	JXF1008030	JXF1008030H

Note: The indoor concealed box can be customized. To order such indoor box, a letter "R" is specified when ordering; to order the concealed box sized 250 x 200 x 140, the order number is JXF252014R.

## JXF Series Metal Distribution Box

### 3 Outline Dimension Diagram

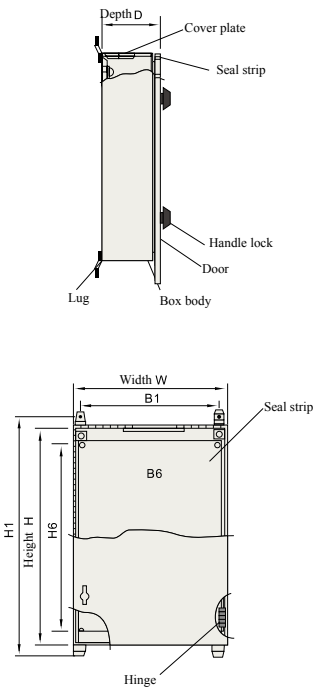

Product model	Housing thickness (mm)	External dimensions			Installation dimensions		Baseplate		Number of door locks
		H	W	D	H1	B1	H6	B6	
JXF-2520/14	1.0	250	200	140	290	150	170	158	1
JXF-3025/14	1.0	300	250	140	340	200	220	208	1
JXF-3025/18	1.0	300	250	180	340	200	220	208	1
JXF-3030/14	1.0	300	300	140	340	250	220	258	1
JXF-3030/18	1.0	300	300	180	340	250	220	258	1
JXF-4030/14	1.0	400	300	140	440	250	320	258	1
JXF-4030/20	1.0	400	300	200	440	250	320	258	1
JXF-5040/14	1.0	500	400	140	540	350	420	358	2
JXF-5040/20	1.0	500	400	200	540	350	420	358	2
JXF-5040/25	1.0	500	400	250	540	350	420	358	2
JXF-6040/14	1.2	600	400	140	640	350	520	358	2
JXF-6040/20	1.2	600	400	200	640	350	520	358	2
JXF-6040/25	1.2	600	400	250	640	350	520	358	2
JXF-6050/14	1.2	600	500	140	640	450	520	458	2
JXF-6050/20	1.2	600	500	200	640	450	520	458	2
JXF-6050/25	1.2	600	500	250	640	450	520	458	2
JXF-7050/16	1.2	700	500	160	740	450	620	458	2
JXF-7050/20	1.2	700	500	200	740	450	620	458	2
JXF-7050/25	1.2	700	500	250	740	450	620	458	2
JXF-8060/20	1.5	800	600	200	840	550	720	558	2
JXF-8060/25	1.5	800	600	250	840	550	720	558	2
JXF-10080/20	1.5	1000	800	200	1040	750	920	758	2
JXF-10080/25	1.5	1000	800	250	1040	750	920	758	2
JXF-10080/30	1.5	1000	800	300	1040	750	920	758	2