

TGBGLB-63 Series Residual Current Circuit Breaker with Overcurrent Protection, Electronic B Type




1 Overview

TGBGLB-63 series residual current circuit breaker with overcurrent protection (hereinafter referred to as leakage circuit breaker) is mainly used in AC 50Hz line with rated working voltage 230V/400V and rated current up to 63A. In case of personal electric shock or when the grid leakage exceeds the specified value, the residual current circuit breaker can quickly cut off the power supply in a very short time for protection of the safety of people and electrical equipment, for overload, short circuit, and overvoltage protection and infrequent conversion of the line under normal conditions, especially suitable for industrial and commercial lighting distribution systems.

2 Type Designation

TG B G LB - 63 1P+N C 16 30mA

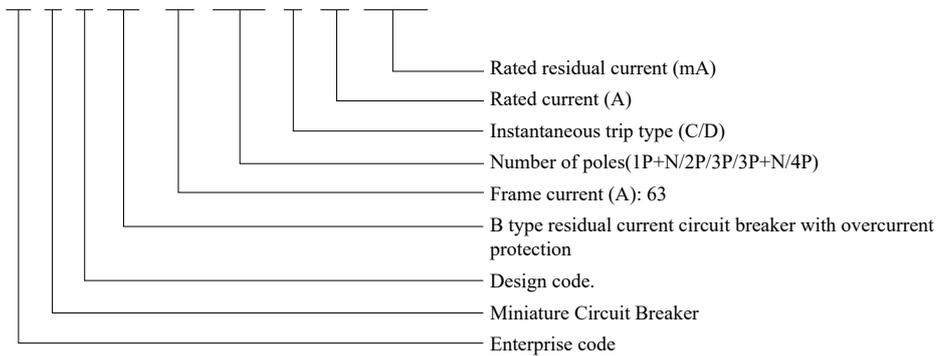

3 Technical Parameters

3.1 The main technical parameters of the product (see Table 1)

Table 1

Product name	TGBGLB-63	
Standard	IEC61009-1	
Electrical characteristics		
Number of poles	1P+N, 2P, 3P 3P+N, 4P (N pole is always on)	
Rated current (A)	I_n	6、10、16、20、25、32、40、50、63
Rated voltage (V)	U_e	AC230 (1P+N, 2P) AC400 (3P, 3P+N, 4P)
Rated insulation voltage (V)	U_i	690
Rated impulse withstand voltage (kV)	U_{imp}	4
Rated residual operating current (mA)	$I_{\Delta n}$	30, 50, 100, 300
Residual current characteristics	B type	
Rated run short circuit breaking capacity (kA)	I_{cs}	6
Rated short circuit breaking capacity (kA)	I_{cn}	6
Instantaneous trip characteristics	C(5I _n -10I _n) D(10I _n -14I _n)	
Mechanical properties		
Electrical life	10,000	
Mechanical life	20,000	
Pollution degree	2	
Protection grade	IP20	
Normal operation conditions and installation characteristics		
Ambient temperature	-35°C ~ +70°C	
Installation altitude	Not exceed 2000m	
Wiring terminal	Pressed with screw	
Max. wiring capacity (mm ²)	25	
Max. ultimate torque (N.m)	2.5	

TGBGLB-63 Series Residual Current Circuit Breaker with Overcurrent Protection, Electronic B Type

Table 1, Continued

Product name	TGBGLB-63
Installation category	Class II, III
Installation method	TH35-7.5 standard rail
Inlet method	Top inlet
Installable accessories	MX: Shunt release OF: Aux. contact SD: Alarm contact MX+OF: Shunt + Aux. release MV: Overvoltage release MN: Undervoltage release MV+MN: Undervoltage release


3.2 Action characteristics of circuit breaker overcurrent release (see Table 2)

Table 2


No.	Test current (A)	Start state	Set time	Expected outcome	Remarks
a	1.13I _n	Cold state	t ≤ 1h	No trip	The current rises to the specified value within 5s
	1.45I _n	Followed by 1.1.3I _n test	t < 1h	trip	
	2.55I _n	Cold state	$1s < t < 60s$ (For I _n ≤ 32A) $1s < t < 120s$ (For I _n ≤ 32A)	trip	
b	5I _n	Cold state	t ≤ 0.1s	No trip	Turn on the auxiliary switch for making current
	10I _n	Cold state	t < 0.1s	trip	
c	10I _n	Cold state	t ≤ 0.1s	No trip	Turn on the auxiliary switch for making current
	14I _n	Cold state	t < 0.1s	trip	

Note: The cold state refers to the temperature 30°C without load before the test.

3.3 Protection characteristic curve of circuit breaker

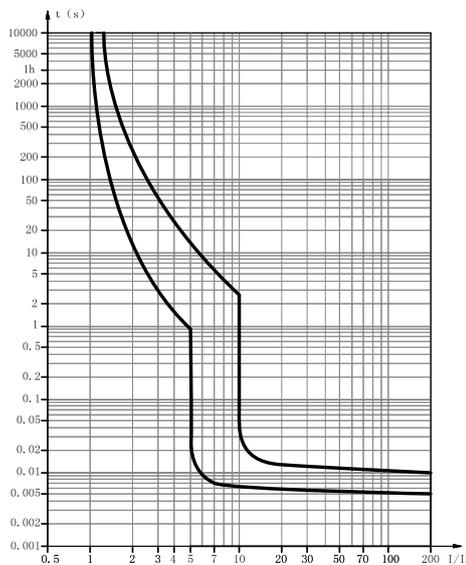

C Type protection characteristic curve

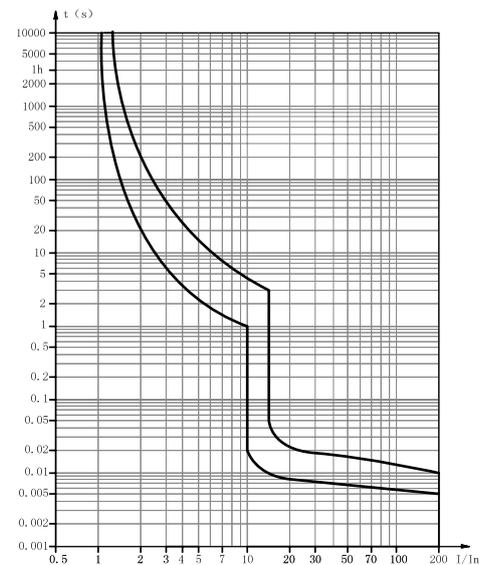

D Type protection characteristic curve

Modular Devices

TGBGLB-63 Series Residual Current Circuit Breaker with Overcurrent Protection, Electronic B Type

3.4 Wiring: Suitable for wire connection of 25mm² and below (see Table 3). The wiring method is that the wire is fixed with screws according to the tightening torque 2.5N·m.

Table 3

Rated current (A)	Cross area of wire (mm ²)
6	1
10	1.5
16 ~ 20	2.5
25	4
32	6
40 ~ 50	10
63	16

4 Outline and Installation Dimensions

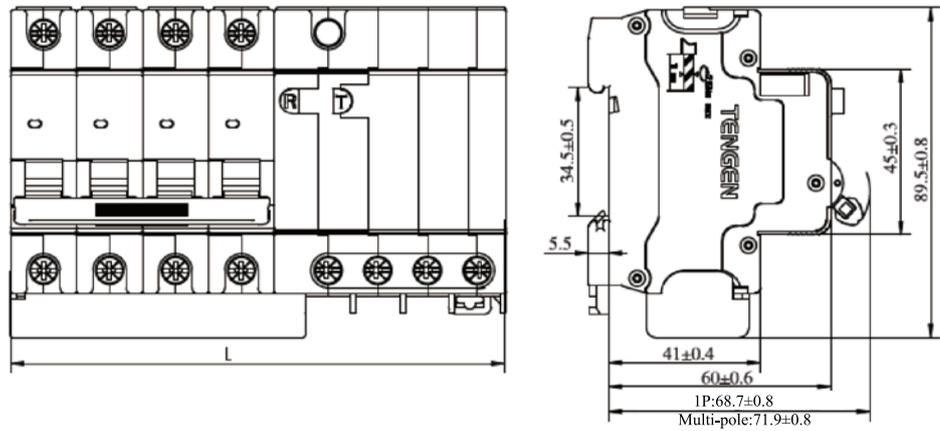


Table 4

Model	Number of poles	L (mm)
TGBGLB-63	1P+N	54 ⁺⁰ _{-1.2}
TGBGLB-63	2P	72 ⁺⁰ _{-1.6}
TGBGLB-63	3P	103.5 ⁺⁰ _{-2.3}
TGBGLB-63	3P+N	117 ⁺⁰ _{-2.6}
TGBGLB-63	4P	135 ⁺⁰ _{-3.0}

TGBGLB-63 Series Residual Current Circuit Breaker with Overcurrent Protection, Electronic B Type

5 Ordering Notice

- 5.1 Product model and name, such as: TGBGLB-63 residual current operated circuit breaker
- 5.2 Trip type, such as: C type
- 5.3 Number of poles of product, such as 2P
- 5.4 Rated current, such as 10A
- 5.5 Rated residual operating current, such as: 30mA
- 5.6 Order quantity, such as: 50 units
- 5.7 Order example: TGBGLB-63 2P C10 30mA, 50 units